

NOTES:

1 - DUST CAPS ARE INCLUDED BUT NOT SHOWN

2 - LC: IL<0.25dB, 850nm
MTP: IL<0.6dB, 850nm

IL CONNECTOR VALUE ACCORDING IEC 61300-3-4 method B


3 - Temperature range: operation: -20°C to +70°C (PVC)
storage: -40°C to +70°C (PVC)
installation: -0°C to +70°C (PVC)

The Fanoutcable is available in the following variants:

MTP 48 to 48 x LC
MTP 48 to 48 x ST
MTP 48 to 48 x SC

All variants are only available in MULTIMODE.

CONNECTION TABLE				
FIBER COLOUR	MTP / LC			
BLUE	1	13	25	37
ORANGE	2	14	26	38
GREEN	3	15	27	39
BROWN	4	16	28	40
GREY	5	17	29	41
WHITE	6	18	30	42
RED	7	19	31	43
BLACK	8	20	32	44
YELLOW	9	21	33	45
VIOLET	10	22	34	46
PINK	11	23	35	47
AQUA	12	24	36	48

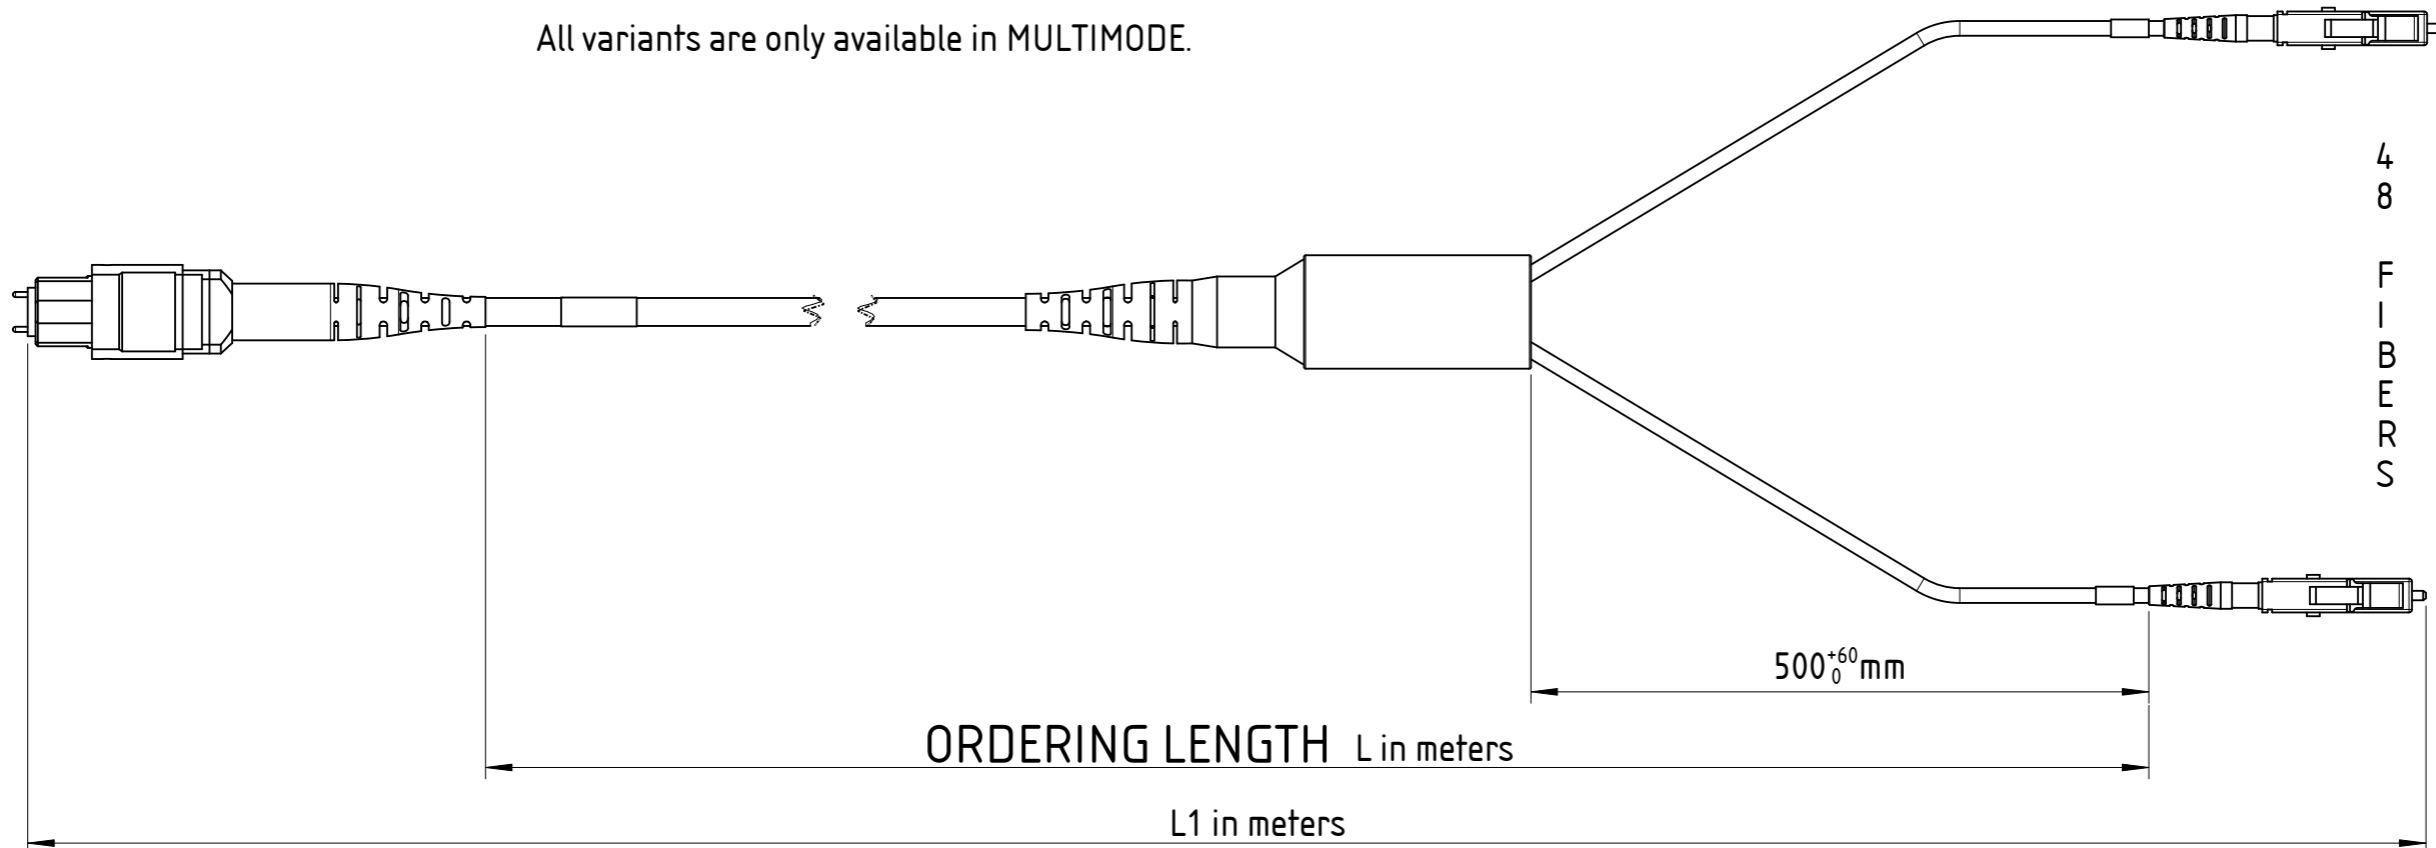

Sheet Number 1/1	Projection 	Scale 1:1	Format A3	General Tolerancing ISO 2768 mK	
Description			Created on/by	12.06.2024	Schuster R.
1x48f MTP(M) to 48x* 48F FANOUT CABLE			Approved on/by		
			Article ID	Model ID	Drawing ID
				MTP Fanout Cable	MTP Fanout Cable
Status	Revision	ECN Number	Neutrik Group		
	-	-			